

PRODUCT DATASHEET

IP65+All PC+High luminous efficiency - Wall Light HYD-02-20W 6500K



Application

- Villa
- Courtyard
- Doorway
- Balcony
- Corridor

Benefits

- Flicker free
- Lighting coverage area is wide
- Protection against water & dust, IP65
- Low power, high light efficiency, energy saving and environmental protection

Features

- Warranty 3 years
- All PC,Good light transmission
- High light transmission mask to ensure uniform light, reduce the dark area of the lighting environment





Electrical Data

Nominal wattage (W)	20W	
Nominal Voltage (V)	220	
Mains Frequency (Hz)	50	
Nominal Current (mA)	95	
LED Driver Current (mA)	330	
LED Driver Voltage (VDC)	60	
LED Driver Efficiency (%)	85%	
Power Factor λ	0.9	
Operating mode	Built in LED driver	

Photometrical data

Luminous flux ±10% (lm)	2362 lm	
Luminous efficacy	116 lm/w	
Color temperature	6500K	
Light color (designation)	Cold White	
Color rendering index Ra	≥80	
Standard deviation of color matching	≤5 SDCM	
Luminous intensity/cd	653 cd	
Flickering	Flicker free	
Beam angle	123 °	

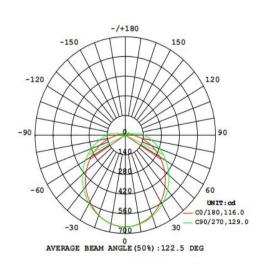

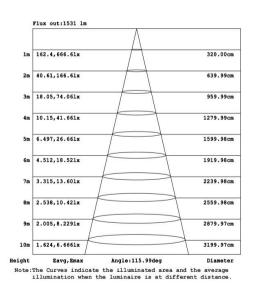


IES



Dimensions & Weight

Diameter (mm)	144*270	
Height (mm)	68.5	
Product weight (g)	359	

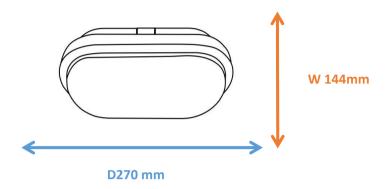

Material & Colors

Product color	All White	
Housing color	White	
Body material	PC	
Cover material	PC	
Reflector color	White	
Mercury content	0.0 mg	

Application & Mounting

Application & mounting			
Ambient temperature range	-30°C~+50 °C		
Temperature range at storage	-40°C~+50 °C		
Type of connection	Screw terminal		
Type of protection	IP65		
Dimmable	No		
Mounting type	Surface mounted		
Mounting location	Wall/Ceiling		
Application environment	Indoor/Outdoor		
Cut size (mm)	No		
LED module replaceable	Not replaceable		
With light source	Yes		




Certificates & Lifespan


Life (h)	30,000		
Certificates	CB CE LVD EMC		
Standards	ISO9001:2015		


Logistical Data


Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-O2-20W	49*39.5*58 cm	30		0.11226 m³

Installation Method

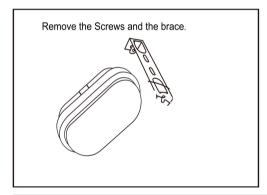

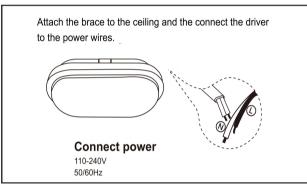

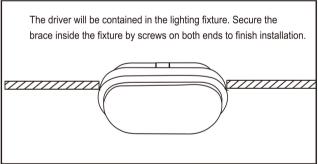

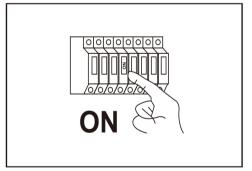

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.