
PRODUCT DATASHEET

Magnetic spot Light

FL**0**3-10**W 3K/4K/6K**



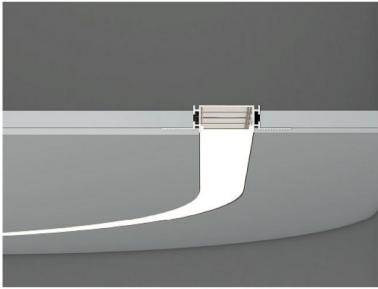

Application

- Hotel
- Mall
- Supermarket
- Theater
- Shop

Benefits

- Flicker free
- Adjustable, flexible light control
- Minimum Glare, more clear and comfortable
- High color rendering index, restore the true color of the object, show its beauty

Features

- Warranty 5 years
- High efficiency lens design, resulting in a clear edge of the soft spot
- Die-cast aluminum lamp body, good heat dissipation performance, protect the chip, extend the service life




Electrical Data

Nominal wattage (W)	10w/m
Nominal Voltage (V)	24
Mains Frequency (Hz)	50/60Hz
Power Factor	1
Operating mode	DC Driver

Photometrical data


Luminous flux ±10% (lm)	1000 lm /m
Luminous efficacy	100 lm/w
Color temperature	3K/4 K/6K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	≤5 SDCML
Flickering	Flicker free
Beam angle	116°





Dimensions & Weight

Length*Width (mm)	L*30
Height (mm)	13
Product weight (g)	





Material & Colors

Product color	Black/White
Housing color	Black/White
Body material	Aluminum
Cover material	PC
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20°C~+45 °C
Temperature range at storage	-20°C~+60 °C
Chip	SMD LUMILED
Type of protection	IP20
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling / Wall
Application environment	Indoor
Cut size (mm)	10cm
LED module replaceable	replaceable
With light source	Yes



Certificates & Lifespan

Life (h)	50,000
Certificates	CB LVD EMC RoHS
Standards	ISO9001:2015

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.